

Device Features

- OIP3 = 43.8 dBm @ 100 MHz
- Gain = 26.9 dB @ 100 MHz
- Output P1 = 20.8 dBm @100 MHz
- CTB = 79.3 dBc @ 100MHz
- CSO = 61.2 dBc @ 100MHz
- Lead-free/RoHS-compliant SOT-89 SMT package

Product Description

BeRex's BIG8 is a high performance InGaP/GaAs HBT MMIC amplifier, internally matched to 75 Ohms. The BIG8 is designed for high linearity IF amplifier that require excellent gain ,high OIP3 and flatness. It is packaged in a RoHS-compliant with SOT-89 surface mount package and design in set-top infrastructure projects for 75 ohm CATV applications.

Applications

- Set-Top Box
- Drop Amplifier
- FTTH Receiver / Optical Transmitter
- RFoG / MOCA

Applications Circuit

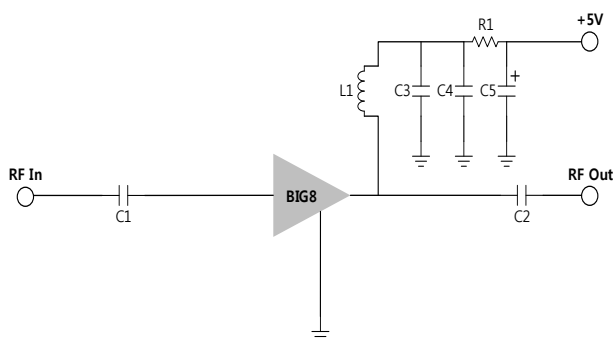


Figure 1 Applications Circuit

Package Type



SOT-89 SMT Package
Figure 2 Package Type

Typical Performance¹

Parameter	Value					Unit
	50	100	300	500	600	
Frequency	50	100	300	500	600	MHz
Gain	26.9	26.9	26.4	25.7	25.3	dB
S11	-8.1	-8.1	-8.6	-9.4	-9.9	dB
S22	-14.4	-15	-14.6	-15.1	-14.5	dB
OIP3 ²	43.1	43.8	40.8	39.4	39.2	dBm
P1dB	20.4	20.8	20.8	20.4	20.0	dBm
NF	2.8	2.8	3.2	3.2	3.3	dB
CTB ³	79.1	79.3	80.0	81.1	80.9	dBc
CSO ³	60.3	61.2	61.5	61.1	57.9	dBc

¹ Device performance _ measured on a BeRex evaluation board at 25°C, 75 Ω system.

² OIP3 _ measured with two tones at an output of 8 dBm per tone separated by 1 MHz.

³ CTB/CSO _ measured in 100 channels, 27dBmV/channel flat loading conditions.

Parameter	Min.	Typical	Max.	Unit
Bandwidth	45		600	MHz
I _c @ (V _c = 5V)	85	100	115	mA
V _c		5.0		V
dG/dT		-0.004		dB/°C
R _{TH}		66.6		°C/W

Absolute Maximum Ratings


Parameter	Rating	Unit
Operating Case Temperature	-40 to +85	°C
Storage Temperature	-55 to +155	°C
Junction Temperature	+220	°C
Operating Voltage	+6.0	V
Supply Current	160	mA
Input RF Power	23	dBm

Operation of this device above any of these parameters may result in permanent damage.


Typical Performances

Typical conditions are at $V_c = 5V$, $T = 25^\circ C$, $Z_L = 75\Omega$, unless otherwise noted.


S-parameters vs. Temp

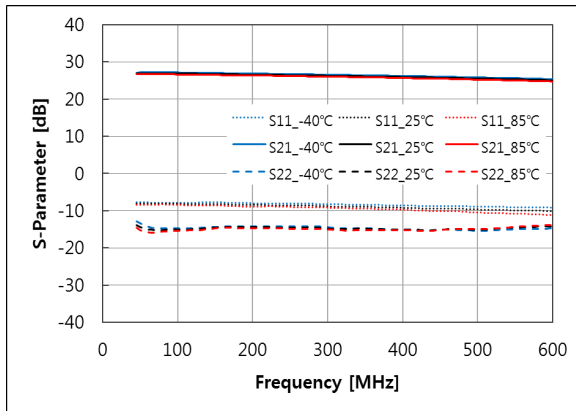


Noise Figure vs. Frequency

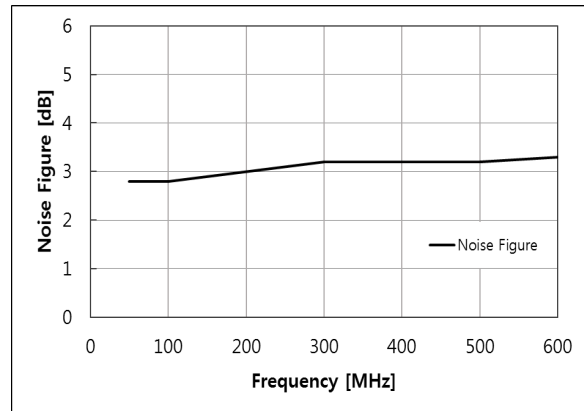


OIP3 vs. Frequency
8dBm / Tone, 1MHz Spacing

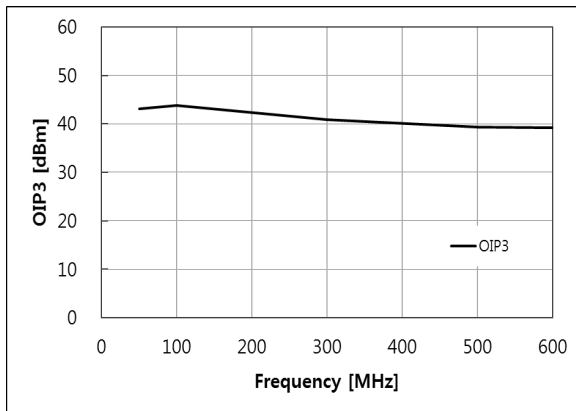


P1dB vs. Frequency

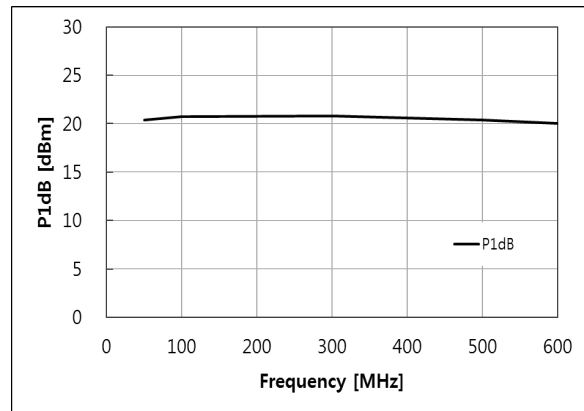


CTB vs. Frequency
100 channels, 27dBmV / channel flat loading

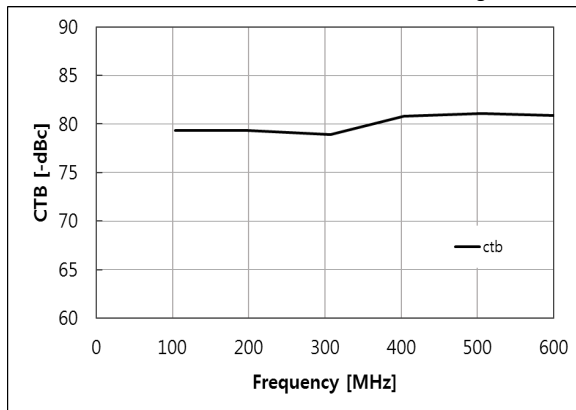


CSO vs. Frequency
100 channels, 27dBmV / channel flat loading

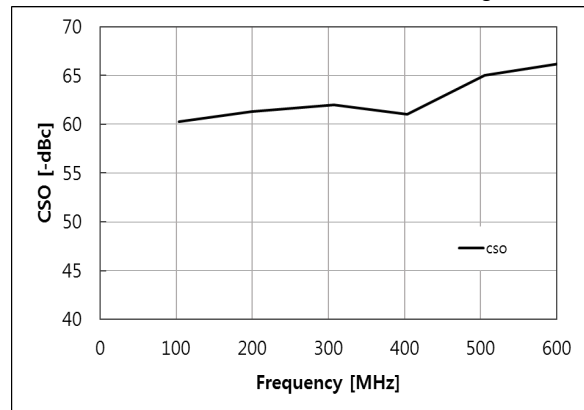

Suggested PCB Land Pattern and PAD Layout

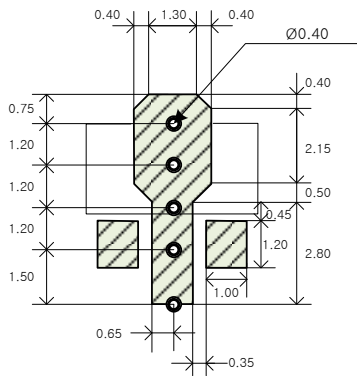
PCB Land Pattern


Note : All dimension _ millimeters

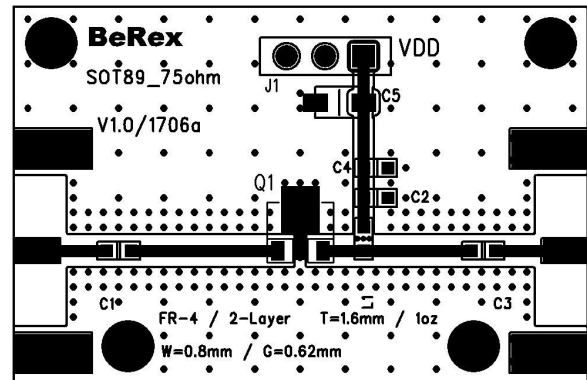PCB Mounting


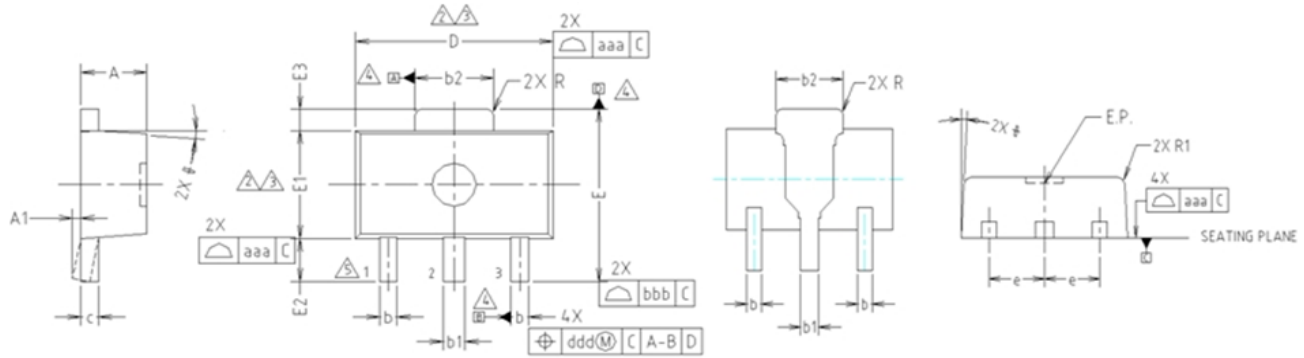
Note : PCB lay out _ on BeRex website

Applications Circuit and Bill of Material

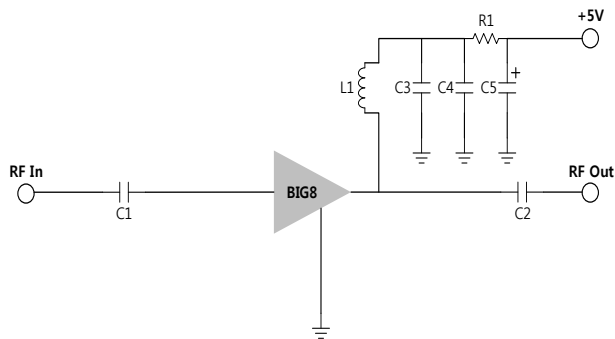Applications Circuit

Bill of Material

No	Ref Des	Qty	Part Number	Remark
1	C1,C2,C3	1	CAP 1608 1nF	
2	C4	1	CAP 1608 1uF	
3	C5	1	CAP A type Tantal 10uF	
4	L1	1	IND 1608 560nH	
5	J1	1	3 Pin Header	
6	RF in, RF out	2	F Type_END_LAUNCH	
7	Q1	1	BIG8	SOT-89


Package Outline Dimension



- NOTE:
1. DIMENSIONS IN MILLIMETERS.
- ▲ DIMENSION D DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.5mm PER END. DIMENSION E1 DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.5mm PER SIDE.
 - ▲ DIMENSIONS D AND E1 ARE DETERMINED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
 - ▲ DATUMS A, B AND D TO BE DETERMINED 0.18mm FROM THE LEAD TIP.
 - ▲ TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.

SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	1.40	1.50	1.60	
A1	0.00	—	0.10	
b	0.38	0.42	0.48	
b1	0.48	0.52	0.58	
b2	1.79	1.82	1.87	
c	0.40	0.42	0.46	
D	4.40	4.50	4.70	2,3
E	3.70	4.00	4.30	
E1	2.40	2.50	2.70	2,3
E2	0.80	1.00	1.20	
E3	0.40	0.50	0.60	
e	1.50 TYP.			
φ	4° TYP.			
R	0.15 TYP.			
R1	—	—	0.20	
SYMBOL	TOLERANCES OF FORM AND POSITION	NOTE		
aaa	0.15			
bbb	0.20			
ccc	0.10			
ddd	0.10			

Package Marking

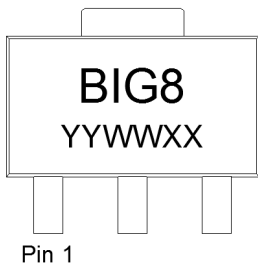


YY = Year, WW = Working Week,
XX = Wafer No.

Tape & Reel

SOT89

Packaging information:



- Tape Width (mm): 12
- Reel Size (inches): 7
- Device Cavity Pitch (mm): 8
- Devices Per Reel: 1000

Lead plating finish

100% Tin Matte finish

(All BeRex products undergoes a 1 hour, 150 degree C, Anneal bake to eliminate thin whisker growth concerns.)

MSL / ESD Rating

ESD Rating:	Class 2
Value:	Passes <4000V
Test:	Human Body Model (HBM)
Standard:	JEDEC Standard JESD22-A114B
MSL Rating:	Level 1 at +265°C convection reflow
Standard:	JEDEC Standard J-STD-020



Proper ESD procedures should be followed when handling this device.

NATO CAGE code:

2	N	9	6	F
---	---	---	---	---