



Package Outline Drawing

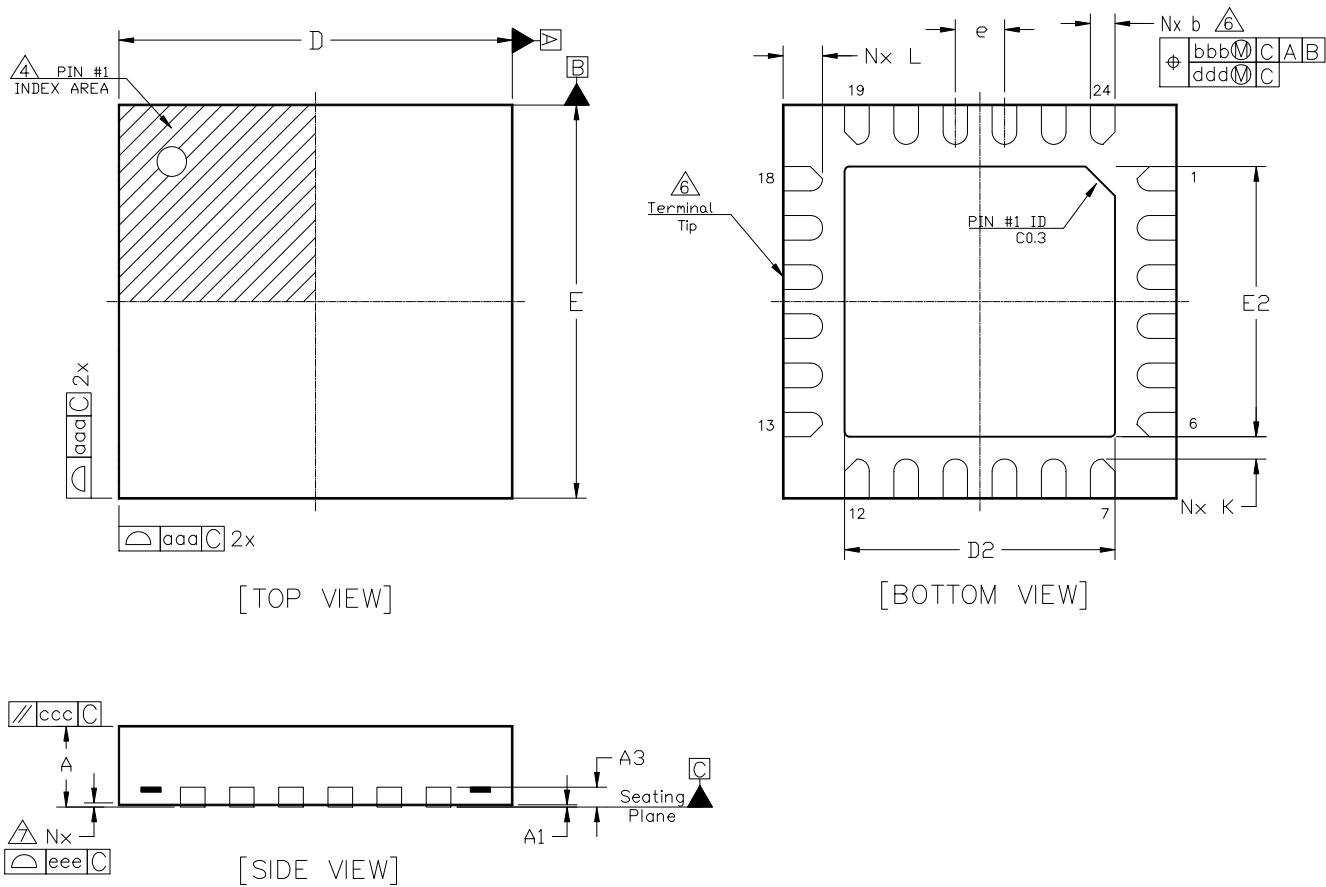


NOTES:

- Dimensioning and tolerancing conform to ASME Y14.5-2009.
- All dimensions are in millimeters.
- N is the total number of terminals.
- The location of the marked terminal #1 identifier is within the hatched area.
- ND and NE refer to the number of terminals each D and E side respectively.
- Dimension b applies to the metallized terminal and is measured between 0.15mm and 0.3mm from the terminal tip. If the terminal has a radius on the other end of it, dimension b should not be measured in that radius area.
- Coplanarity applies to the terminals and all other bottom surface metallization.

Dimension Table (Notes 1,2)				
Thickness Symbol	Min	Nominal	Max	Note
A	0.70	0.75	0.80	
A1	0.00	0.02	0.05	
A3	---	0.203 Ref.	---	6
b	0.20	0.25	0.30	
D	4.00 BSC			
E	4.00 BSC			
e	0.50 BSC			
D2	2.65	2.70	2.75	
E2	2.65	2.70	2.75	
K	0.2	---	---	
L	0.30	0.40	0.50	
aaa	0.05			
bbb	0.10			
ccc	0.10			
ddd	0.05			
eee	0.08			
N	24			3
ND	6			5
NE	6			5


Package Size: 4.0x4.0x0.75mm	Remarks:
Exposed Pad Size: 2.70x2.70mm	Date: 2025/09/30
PIN Pitch: 0.5mm	Title: BSW- 4x4- 24L- P250930v10
Number of Pad: 25	Version: Rev1.0
BeRex Confidential	 BEREX

Land Pattern Recommendation

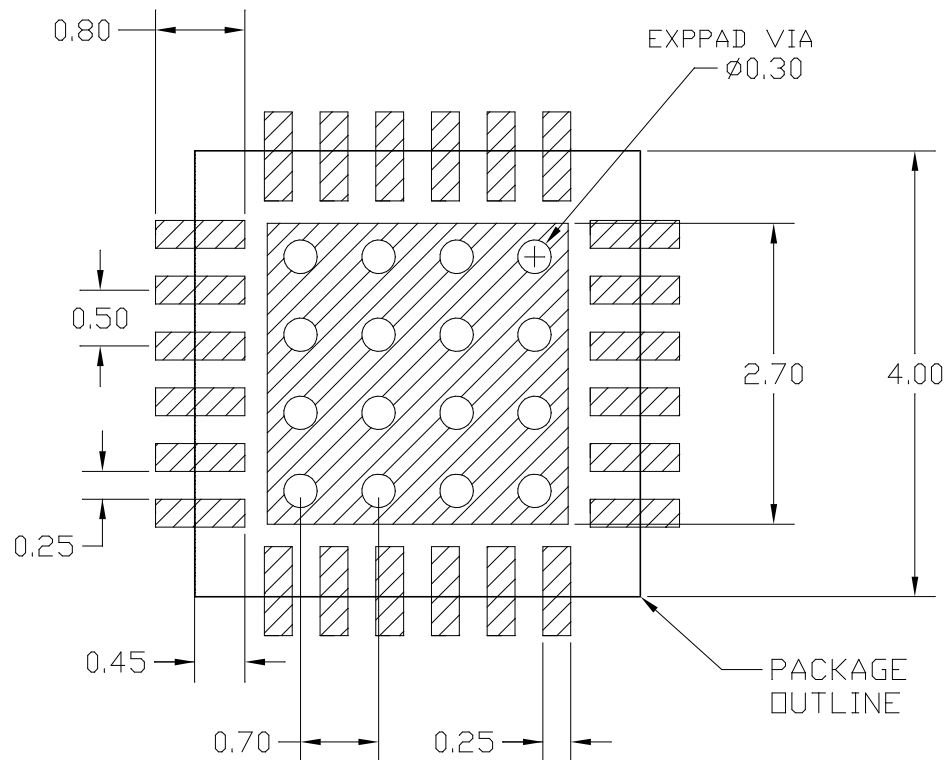

NOTES:

1.All dimensions are in millimeters.

Exposed Pad Size: 2.7x2.7mm	Remarks:
PIN Pitch: 0.5mm	Date: 2025/09/30
Number of Via: 16	Title: BSW-4x4-24L-LP250930
Via diameter: 0.3mm	Version: Rev1.0
Exposed Pad via pitch: 0.7mm	
BeRex Confidential	 BEREX